



Tubular drive AK60-1 ECO EI60. Gates assembly conditions


DRIVE UNIT BECKER XL120/11M
operational voltage: 230V AC, 50 Hz
power supply: 3 x 1,5 mm², fusing: 10A delay,
motor performance: 0.435 kW output torque 120Nm

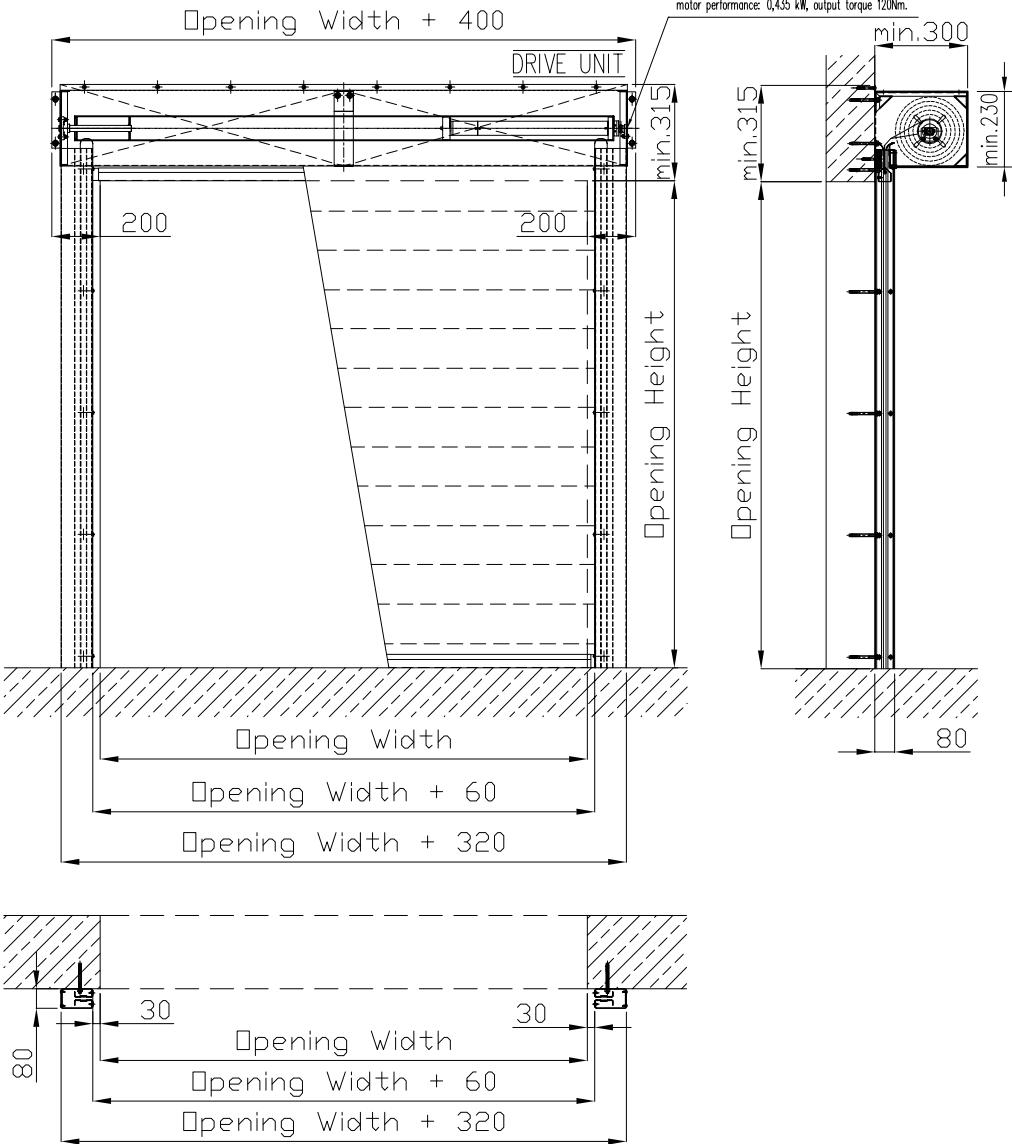


Type 1 housing.

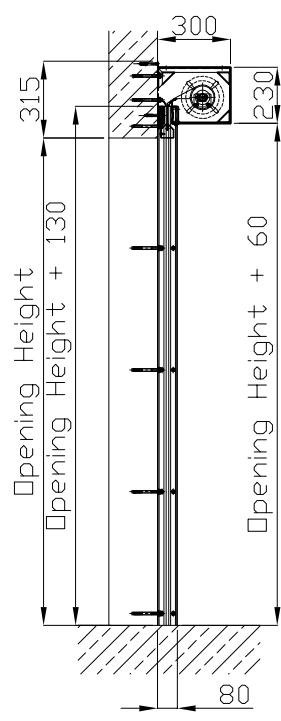


Type 2 housing.

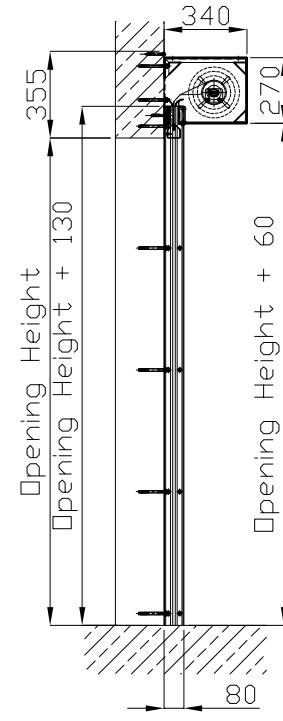


Type 3 housing.

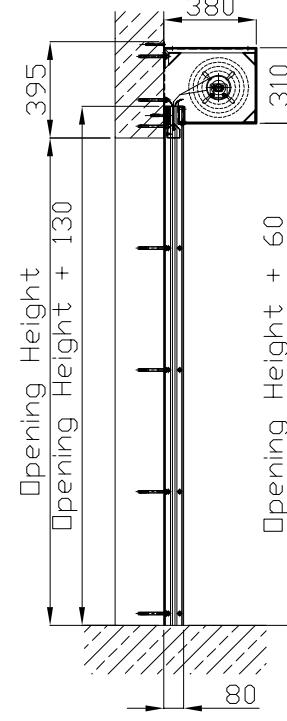


Type 4 housing.

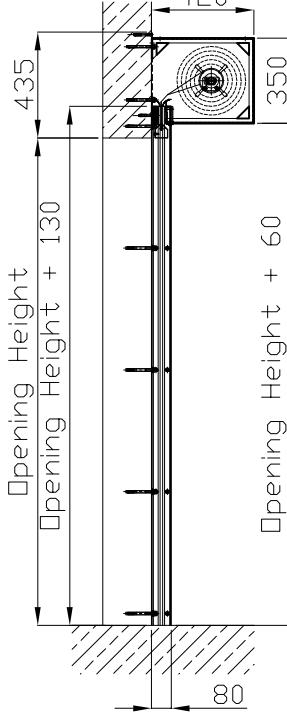


Type 5 housing.

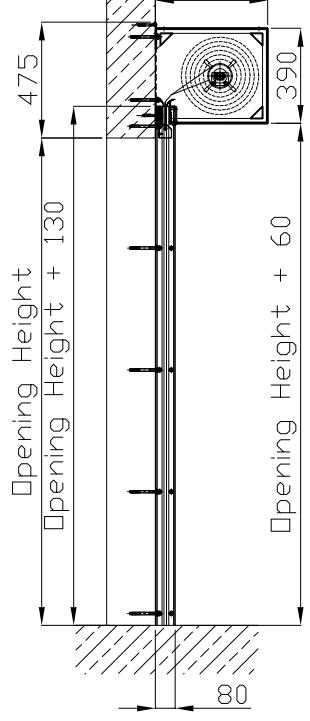


Type 6 housing.

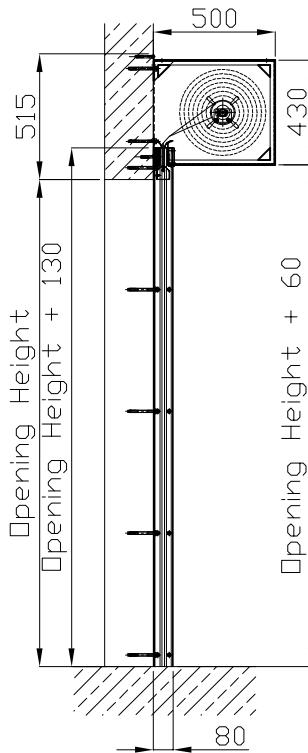


Type 7 housing.

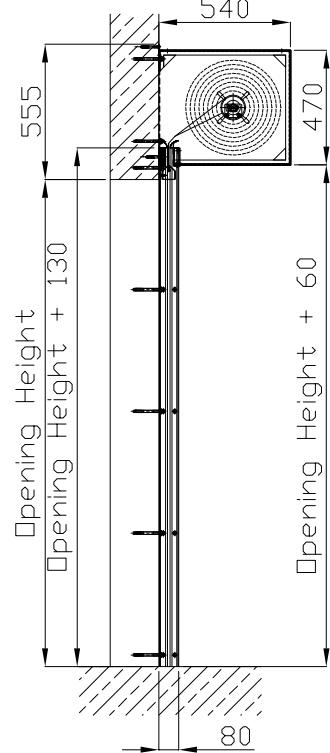

Type 8 housing.

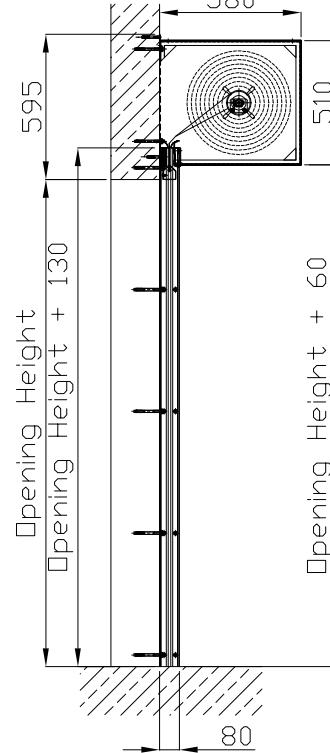

Type 9 housing.

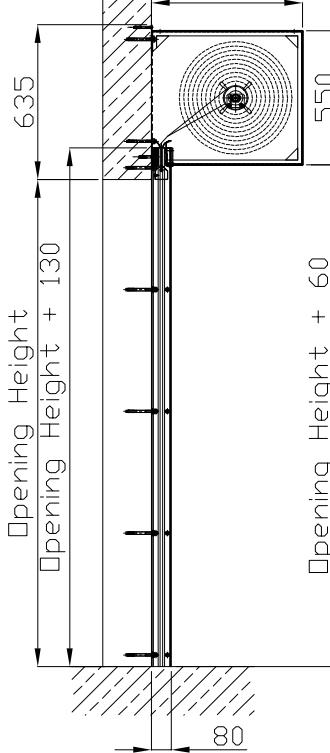

Type 10 housing.

